


## 793nm Fiber-coupled Diode Laser

By adopting specialized fiber-coupling techniques, the manufactured diode laser modules have a high efficiency, stability and superior beam quality. The modules are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspection and burn-in procedures guarantee reliability, stability and long lifetime of each modules.

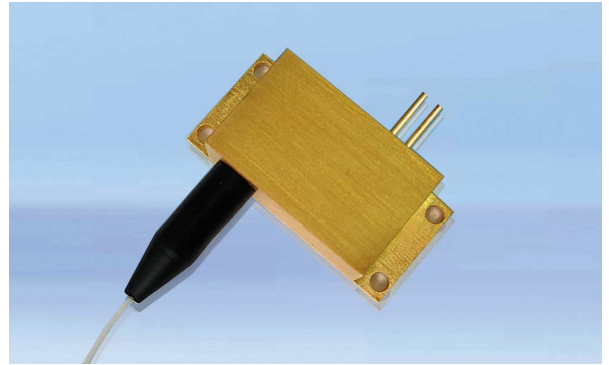



### Features

- 8W CW output power
- 105µm fiber core diameter
- Feedback protection


### Applications

- 2µm laser laser pumping
- Medical equipment

### Package dimension (mm)

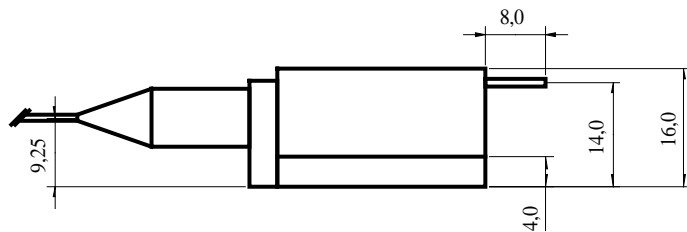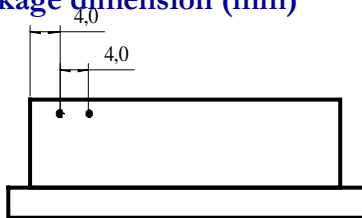

| Function | Pin |
|----------|-----|
| LD +     | 1   |
| LD -     | 2   |

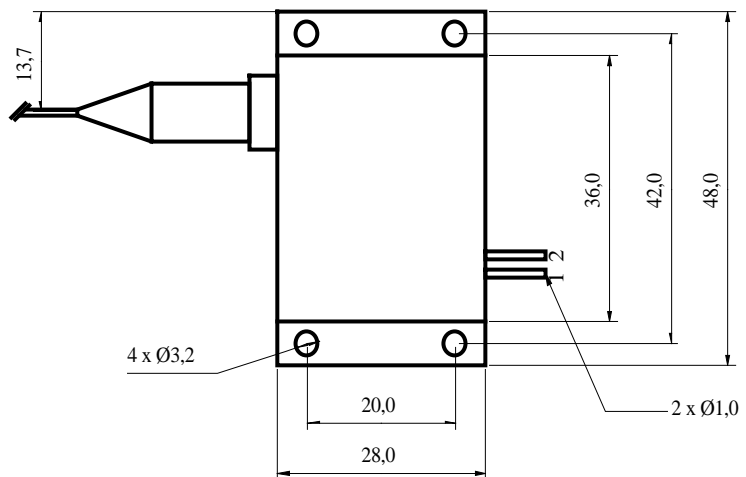

## Module Specifications

| Model                             | M793±3-8-F105/22-T4S |
|-----------------------------------|----------------------|
| <b>Optical parameters</b>         |                      |
| Output power (W)                  | 8                    |
| Central wavelength (nm)           | 793                  |
| Wavelength tolerance (nm)         | ± 3                  |
| Spectral width (FWHM, nm)         | < 3.0                |
| Wavelength temp. coefficient      | 0.35                 |
| <b>Fiber pigtail parameters</b>   |                      |
| Fiber core diameter (µm)          | 105                  |
| Numerical aperture                | 0.22                 |
| Fiber pigtail length (m)          | 1                    |
| <b>Electric parameters</b>        |                      |
| Threshold current (typical, A)    | 0.5                  |
| Operating current (typical, A)    | 2.5                  |
| Operating voltage (typical, V)    | 8.0                  |
| Slope efficiency (typical, W/A)   | 4.0                  |
| Power conversion efficiency       | 40%                  |
| <b>Back reflection protection</b> |                      |
| Wavelength range (µm)             | 1750 - 2200          |
| Attenuation (dB)                  | >40                  |
| <b>Other parameters</b>           |                      |
| Operating temperature (°C)        | 10 – 30              |
| Operating humidity (%)            | < 75                 |
| Storage temperature (°C)          | -20 – +80            |
| Soldering temperature (°C)        | 250 (10s)            |
| Dimension (without fiber, mm)     | 75 x 42 x 18         |

- Notes: 1. Module specifications and dimension are subject to change without notice.  
 2. ESD precautions must be taken.  
 3. The minimum fiber bend diameter should be 300 times greater than the fiber core diameter.  
 3. Reduced lifetime if improperly used or used above operating conditions.  
 4. A non-condensing environment is required for storage and operation below the ambient dew point.

**Compliance with Regulatory Requirements:** This industrial laser is an OEM version of a laser diode. As such, it is intended only for integration into other equipment. This laser does not comply with IEC and CDRH requirements. The customer is responsible for IEC and CDRH certifications of the system that incorporates this industrial laser.

